



*DalLUX*TM

STONE & TILE SUPPORT SERIES
BY DALDORADO



DalLUXTM

STONE & TILE SUPPORT SERIES
BY DALDORADO

Bring your deck to the water's edge

A luxury pool featuring a deck comprised of material, such as stone and tile exudes natural beauty and timeless elegance, and is prized for its strength and durability.

With the Daldorado DalLUXTM Stone and Tile Support Series, designers can take their decking to the next level by bringing the deck to the water's edge for superior aesthetics and functionality.

DALDORADO
10 year
WARRANTY

Stone or Tile*

High load capacity to minimize deflection of stone or tile (+- 5,000 lbs/2,268kg)


Water drop-in openings (notches) ensure the 8mm (0.31") gap to meet IBC Child Finger/Toe Entrapment Guidelines.

Load capacity suitable for normal pedestrian traffic



Adhesive/Sealant (Supplied)

Beads of special adhesive/sealant (supplied) are applied to individual grate supports by a professional stone/tile installer. Use traditional thinset or mastic for the deck as instructed by stone/tile manufacturers.

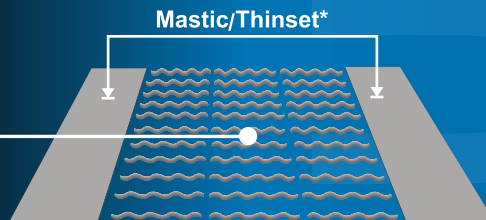


DalLUX™ Support Grate

Two-inch (2") wide supports and custom miter corners are engineered for high-load capacity. DalLUX™ support grates are available in two water drop-in options —

4 openings (3 parallel sections of tile or stone)

5 openings (4 parallel sections of tile or stone)

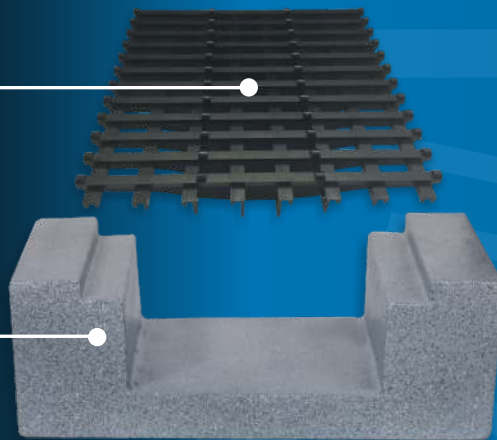

Gutter/Deck*

For straight perimeter pool gutters (new construction or retrofit)

Note: A slight slope of up to .5 inches (12.5mm) or 2 degrees over the span of 12 inches (304mm) helps to minimize any wash over to the deck.

*Stone, Tile, Mastic/Thinset & Gutter Not Included
Contact Daldorado for custom stone supply.



3-slot DalLUX™ support grate shown

General Information

- DalLUX™ is not suitable for pools with consistently higher volumes of bather surge. Such as the likes of competition training pools.
- The pool consultant or customer is responsible for ensuring that the tile or stone is specified, are cut or made, and adhered according to the Installation Instructions.
- Stone and tile must be installed by a company that specializes in laying stone and/or tile.
- Swimming pool design professional is the final authority in determining a four- or five-slot opening to satisfy water capture design flow.
- Stone and tile must comply with Country and local codes for slip resistance qualities.

Now Available
DalLUX™
PORCELAIN TILE

Anti-Slip Bond Beam Flat Tile



Visit our
website for
more details

Finger Grip Tile

DALDORADO

Safety by design—Above & below the waterline.

FOR PRODUCT SAMPLES

1 888 509 8128

daldorado.com

4327 Arnold Ave, Naples, FL 34104

Bahrain Office +973 3598 8104

Pool images shown are renderings and not actual product installation.
© 2020 Daldorado, LLC. All rights reserved.

REV 6-2020