


DPACS STRIP SNAPS INTO POSITION AND SET AT A PITCH TO MATCH PARALLEL GRATING

THE SUPPORT BASE EASILY ADJUSTS DOWN TO A 3 FOOT RADII AND GIVES A STRONG BASE FOR THE CURVED STRIPS THAT MIRRORS THE STRAIGHT VERSION

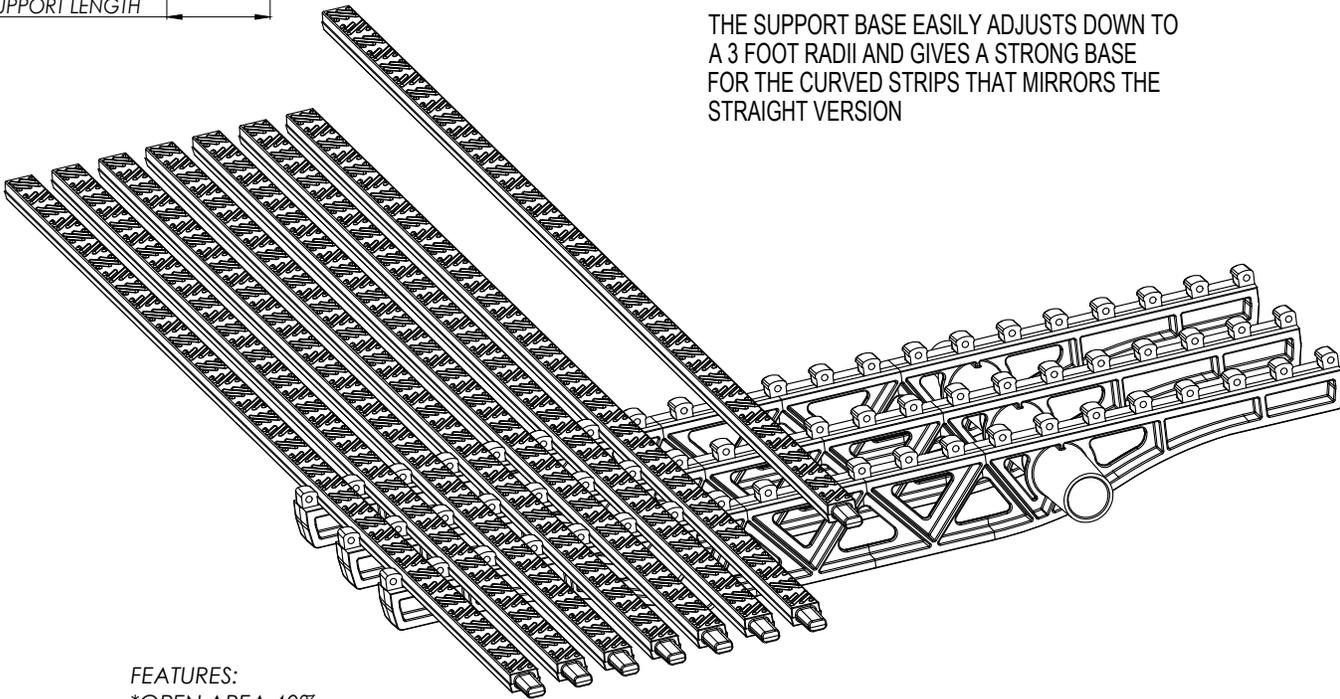

FEATURES:

- *OPEN AREA 40%
- *0.315" (8MM) OPENING COMPLIES WITH THE **IBC** CHILD FINGER/TOE ENTRAPMENT GUIDELINES
- *CERTIFIED LOAD CLASSIFICATIONS UNDER **IBC** STANDARD AS 3996 CLASS "A" AS OVER 10KN FOR GRATES AND COVERS
- *CERTIFIED TO **IBC** CLASSIFICATION "C" (GREATER THAN 24 DEGREE INCLINE) FOR WET-BAREFOOT INCLINING PLATFORM (RAMP) TEST FOR SWIMMING POOL RAMPS AND STAIRS LEADING TO WATER. SWIMMING POOL SURROUNDS AND COMMUNAL SHOWER ROOMS AND COMMUNAL CHANGING ROOMS
- *HIGH GRADE, UV STABLE PVC (AXIALL 7140) CERTIFIED FOR NSF50
- *COLORS WHITE (WT), BONE (BO), GRAY (GY), OTHERS AVAILABLE ON QUANTITY COMMITMENT

IBC--INTERNATIONAL BUILDING CODE

FASTENING SETS SOLD SEPARATELY. SEE INSTALLATION INSTRUCTIONS

All drawing dimensions supplied by Daldorado are for reference only. All drawings are saved in a (*.dwg) file format and a provided as a service to our customers. Errors on occasion may occur when opening a file due to software incompatibility. Daldorado or any authorized distributor of our products will not be held responsible from files which have been converted and does not warranty the documents against deficiencies or typographical errors of any kind. We recommend that all measurements are verified with the actual physical product before any custom fabrication in the field occurs.